



Al Sharq Plas LLC

admin@alsharqplas.com
www.alsharqplas.com

P.O.Box: 112004 ,
Abu Dhabi , UAE
Phone : +971 2 5501770
Fax : +971 2 5501171

Our Products

Heavy Duty Films

- FFS Rolls
- LDPE Bags and Sacks
- Shrink Hood
- Stretch Hood

Converting Films

- Lamination Grade Films
- Hi-Clarity Films For Printing
- Shrink Films

Wrapping Films


- Cast PE Stretch Film
- Top and Bottom Sheet Film



Our stretch film has high puncture resistance, excellent transparency as well as appropriate cling ability with stretchability upto 300 % for automatic pallet wrapping machines as well as for manual wrapping giving customers full benefit without investing in machinery. Stretch films can be available in clear or coloured with UV stabilization option.



Al sharq Plas has several types of high quality stretch films to offer with thickness ranging from 17 μ to 35 μ .
Standard Film for manual and fully automatic pre-stretch machines up to 150%
Power Stretch for fully automatic pre-stretch machines up to 250%.
Super Power for fully automatic pre-stretch machines up to over 300%, high speed.

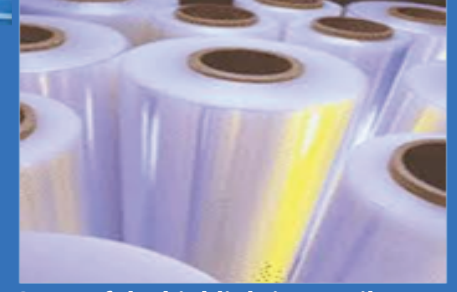

Some of the highlighting attributes of our Stretch films include:

1. Excellent Load Retention –firmly secures product, even under rugged transit conditions.
2. Increased clarity allows users to see wrapped products.
3. Allows the wrap to stay securely wrapped.
4. Elevated Tear and Puncture Resistance

CAST PE STRETCH FILM - PRODUCT INFORMATION

DESCRIPTION	UNIT	VALUE 1	VALUE 2	VALUE 3
PRESTRETCH		150 %	250 %	300 %
THICKNESS	μ m	23	23	23
GRAMMAGE	mm	21.16	21.16	21.16
YIELD	mm	47.3	47.3	47.3
FILM DENSITY	%	0.92	0.92	0.92
DART IMPACT	%	76	165	175
HAZE	%	1.8	2.0	2.0
TENSILE STRENGTH @ BREAK (MD)	N/mm ²	256	285	325
TENSILE STRENGTH @ BREAK (TD)	N/mm ²	210	220	240
ELONGATION @ BREAK (MD)	%	510	510	520
ELONGATION @ BREAK (TD)	%	680	720	720
ROLL LENGTH	mm	Customised	Customised	Customised
ROLL WIDTH	mm	500	500	500
ROLL WEIGHT	Kg	10 – 50 Kg	10 – 50 Kg	10 – 50 Kg
CORE DIA	mm	76	76	76